

CITY LOFTS - SHEFFIELD

OPERATING INSTRUCTIONS FOR TILT/SLIDE VENT

TO PUT THE VENT IN TILT MODE



ROTATE THE HANDLE FROM THE VERTICAL POSITION THROUGH 90° AND THE TOP OF THE VENT WILL 'TILT' INWARDS UNTIL IT REACHES ITS NATURAL 'STOP' POSITION

TO PUT THE VENT IN SLIDE MODE




WITH THE VENT IN 'TILT' MODE, MOVE THE HANDLE DOWNWARDS INTO THE POSITION SHOWN ABOVE

THIS WILL DISENGAGE THE BOTTOM OF THE VENT FROM THE GUIDE TRACK
(SLIGHT 'INWARDS PULLING PRESSURE' MAY BE NEEDED)



ONCE THE BOTTOM OF THE VENT IS FREE FROM THE GUIDE TRACK, IT CAN BE SLID TO THE REQUIRED POSITION UP UNTIL THE VENT IS AGAINST THE TRAVEL STOP

TO CLOSE THE VENT

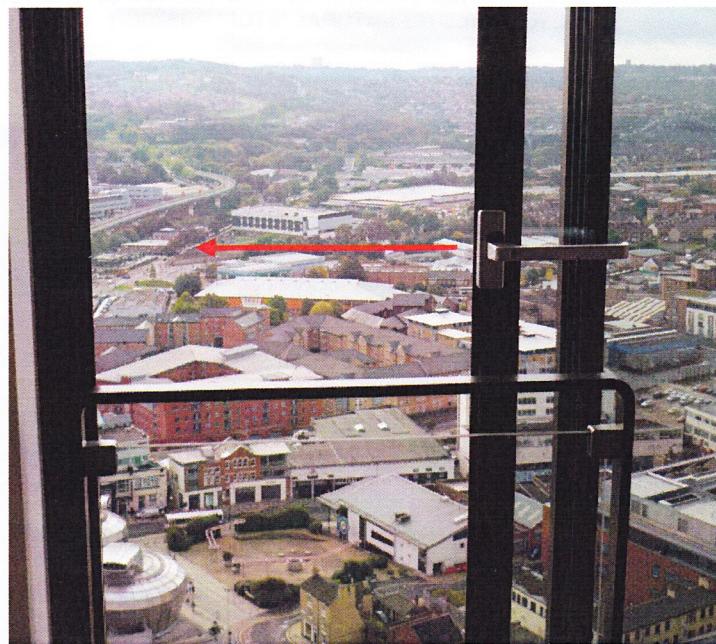

SLOWLY SLIDE THE VENT FROM ITS OPEN POSITION UNTIL IT LOCATES BACK INTO THE GUIDE TRACK AND THE BOTTOM OF THE VENT
(PLEASE ENSURE THE VENT IS LOCATED INTO THE BOTTOM TRACK BEFORE CLOSING THE VENT FULLY)

ONCE THE VENT IS RELOCATED IN THE GUIDE TRACK, PUSH THE VENT CLOSED WHILE LIFTING THE HANDLE FROM THE HORIZONTAL TO THE VERTICAL POSITION